



MATEX
COLLECTION
1200X1800MM



TECHNICAL DETAILS



FROST RESISTANT :

Easy-to-clean surface — just wipe and it's spotless again.



HIGH STRENGTH :

Easy-to-clean surface — just wipe and it's spotless again.



EASY TO CLEAN :

Easy-to-clean surface — just wipe and it's spotless again.



CHEMICALS RESISTANT :

Chemical-resistant surface — withstands spills and harsh cleaners easily.



STAIN RESISTANT :

Stain-resistant surface — repels spills and keeps its flawless look effortlessly.



ANTI-SLIP SURFACE :

Designed with advanced grip patterns for maximum safety and stability.



EASY TO INSTALL :

Installs easily with no special tools or complex steps required.



ECO FRIENDLY

Crafted with nature in mind, for a cleaner and greener future.



APPLICATION AREAS

Our tiles are crafted for versatility and durability across all spaces — from elegant interiors to outdoor areas. Ideal for high-traffic zones like airports, hotels, hospitals, and universities. Perfect for swimming pools and fire exits, offering safety, style, and easy maintenance.



RESIDENTIAL
PLACES



COMMERCIAL
PLACES



PUBLIC
PLACES



STORE HOUSE



RELIGIOUS
PLACES



HOTEL &
RESTAURANT




AIRPORT



RAILWAY
STATION

Multiple Size & Surface Concept


Being one of the leading manufacturer sand exporters of Glazed Porcelain Tiles in India, we offer a wide range of ceramic tiles of diverse shapes, sizes, patterns, and colors enough to satisfy all your artistic desires. Made of the fine straw materials, our Glazed Porcelain Tiles are ideal for interior as well as exterior.

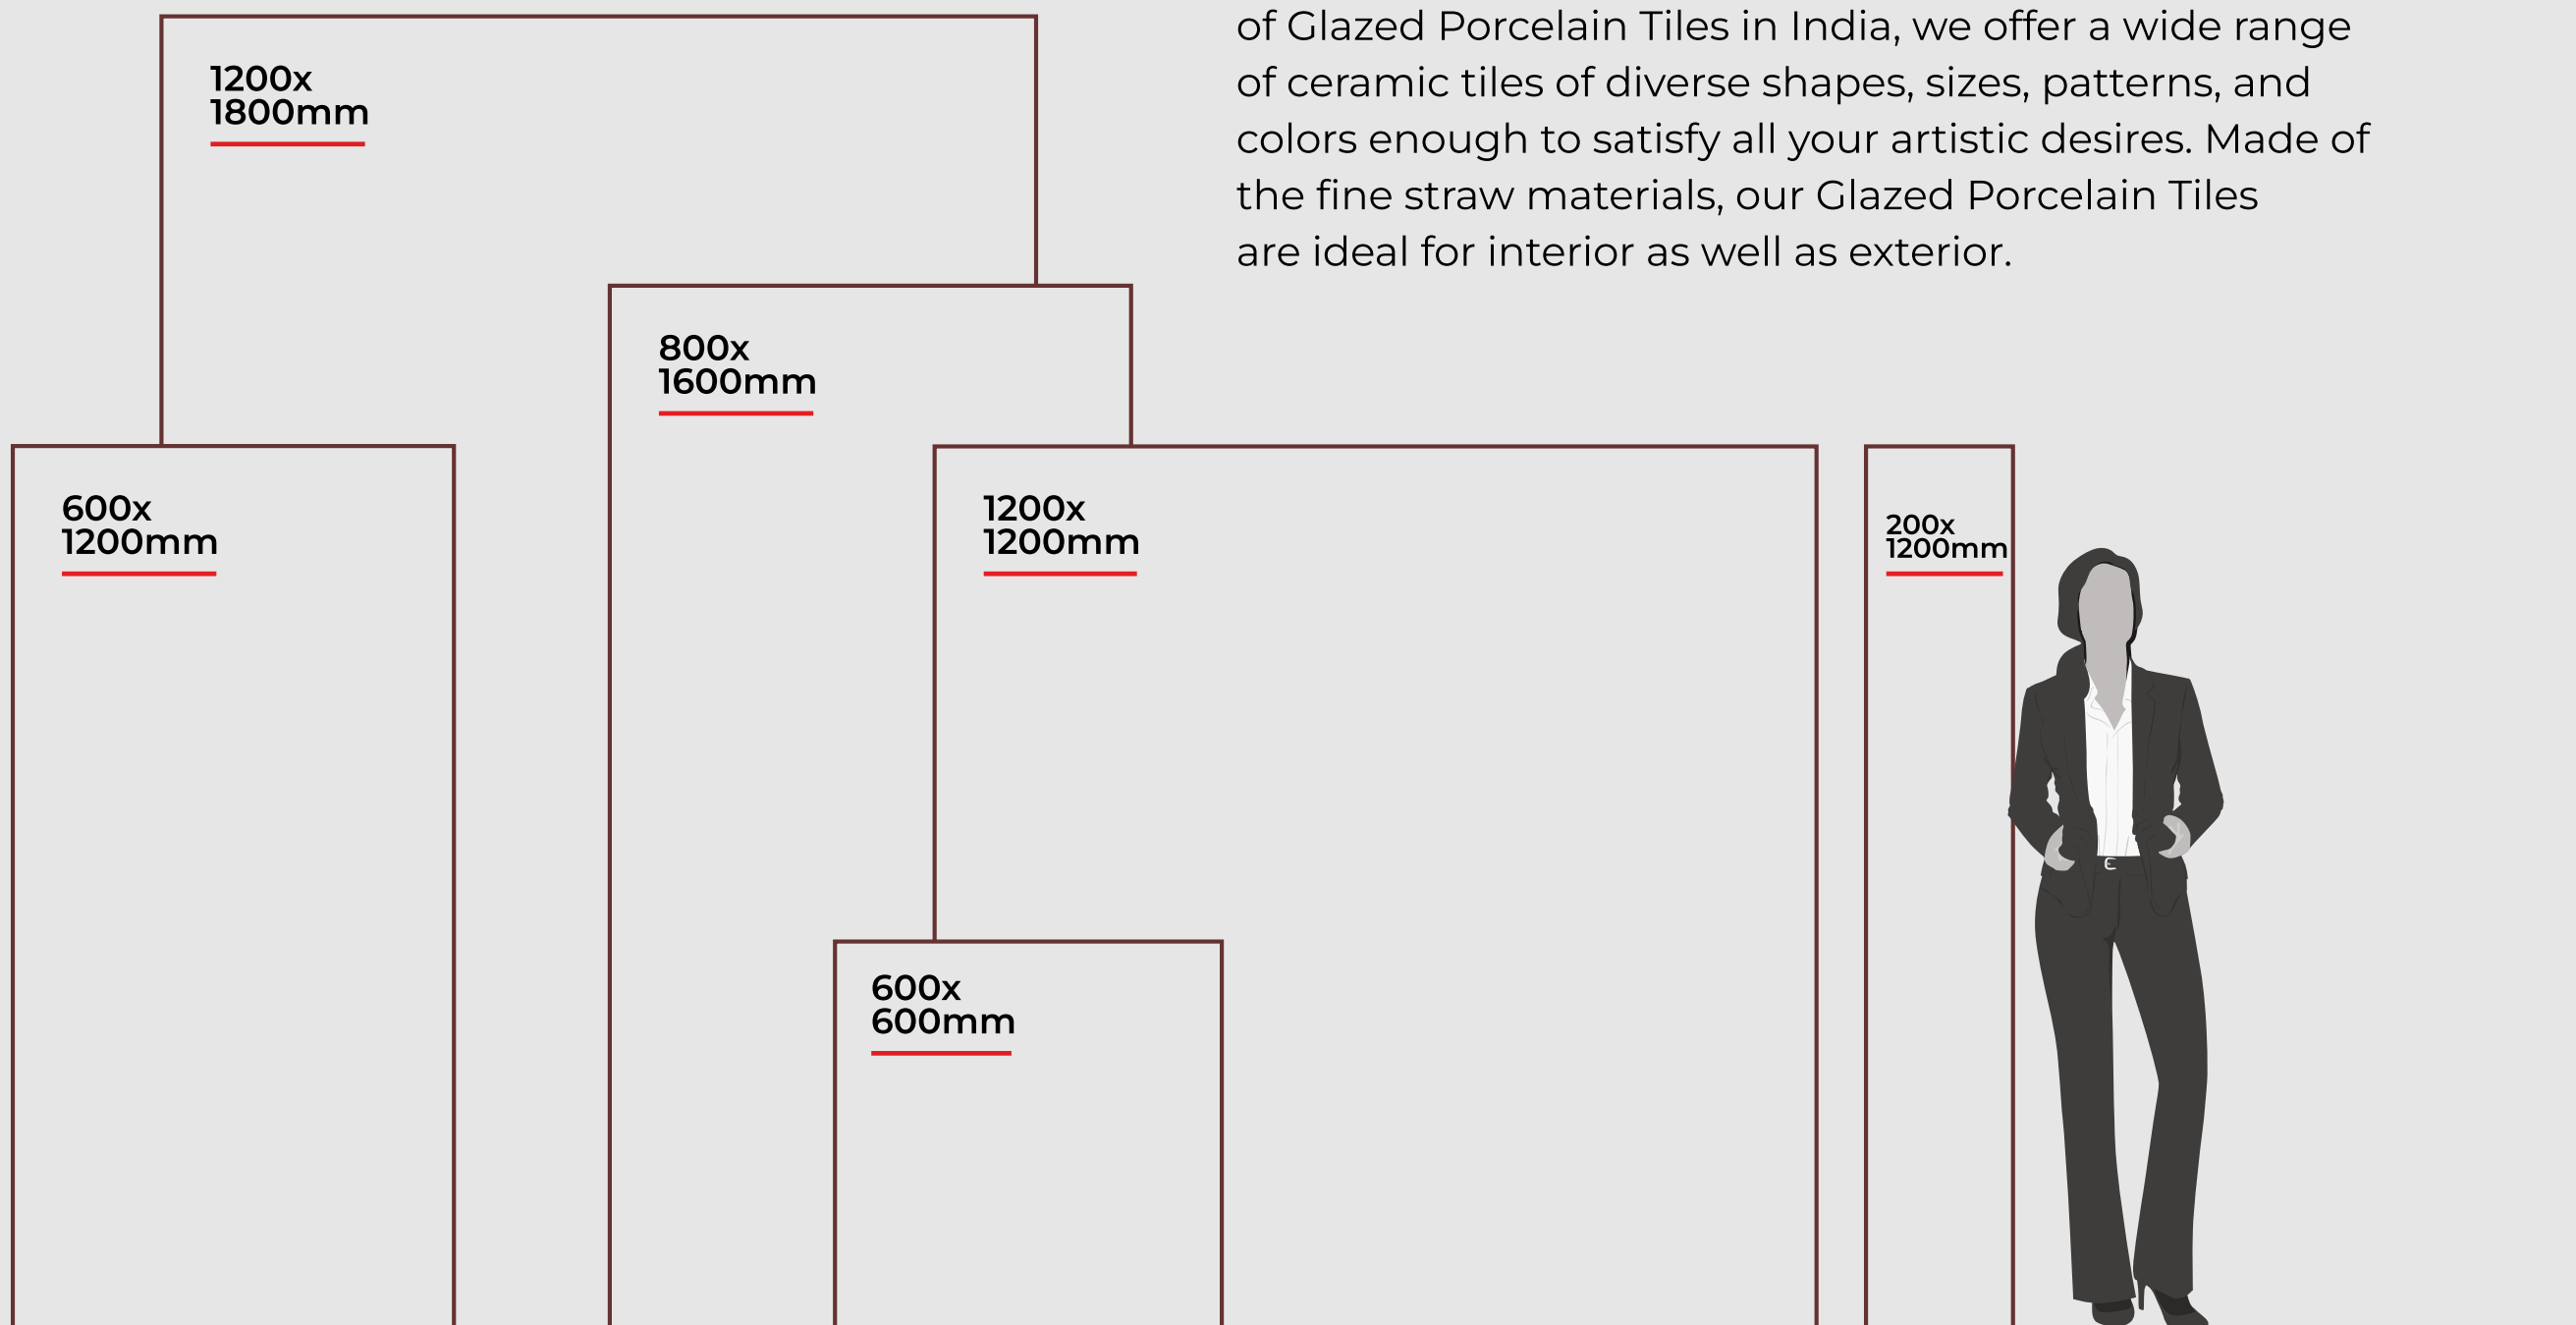

INDEX

1200x1800


MATEX

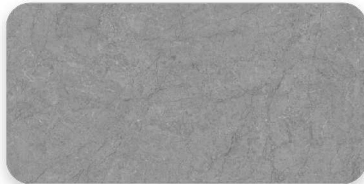

ATLANTIC GREY
ENDLESS




ATLANTIC SILVER
ENDLESS

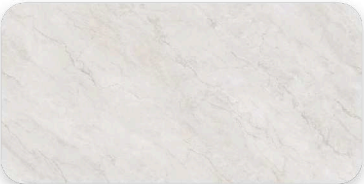

FRANK WHITE ENDLESS



GRIZLI ICE ENDLESS

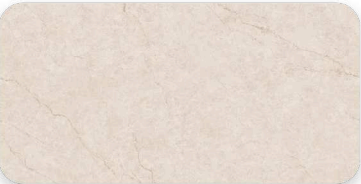

LEVIN BEIGE ENDLESS



LEVIN BIANCO ENELESS



PLATINUM AURORA
ENDLESS



VALLUTO CLASSICO
ENDLESS



VENUS GREY ENDLESS

ATLANTIC GREY ENDLESS



SIZE

1200x1800mm

FINISH

MATEX

THICKNESS

9MM

RANDOM

3

FEATURES

- 

Solid Body
- 

Zero Maintenance
- 

Easy to Clean
- 

High Strength



ATLANTIC GREY ENDLESS

ATLANTIC SILVER ENDLESS



SIZE

1200x1800mm

FINISH

MATEX

THICKNESS

9MM

RANDOM

3

FEATURES



Solid
Body



Zero
Maintenance



Easy to
Clean



High
Strength



ATLANTIC SILVER ENDLESS

FRANK WHITE ENDLESS



SIZE

1200x1800mm

FINISH

MATEX

THICKNESS

9MM

RANDOM

3

FEATURES

- Solid Body
- Zero Maintenance
- Easy to Clean
- High Strength



FRANK WHITE ENDLESS

GRIZLI ICE ENDLESS



SIZE
1200x1800mm

FINISH
MATEX

THICKNESS
9MM

RANDOM
3

FEATURES



Solid
Body



Zero
Maintenance



Easy to
Clean



High
Strength



GRIZLI ICE ENDLESS

LEVIN BEIGE ENDLESS



SIZE

1200x1800mm

FINISH

MATEX

THICKNESS

9MM

RANDOM

3

FEATURES

- 

Solid Body
- 

Zero Maintenance
- 

Easy to Clean
- 

High Strength



LEVIN BEIGE ENDLESS

LEVIN BIANCO ENELESS



SIZE
1200x1800mm

FINISH
MATEX

THICKNESS
9MM

RANDOM
3

FEATURES

- Solid Body
- Zero Maintenance
- Easy to Clean
- High Strength





LEVIN BIANCO ENELESS

MATEX

Collection



PLATINUM AURORA ENDLESS



SIZE
1200x1800mm

FINISH
MATEX

THICKNESS
9MM

RANDOM
4

FEATURES



Solid
Body



Zero
Maintenance



Easy to
Clean



High
Strength





PLATINUM AURORA ENDLESS

VALLUTO CLASSICO ENDLESS



SIZE
1200x1800mm

FINISH
MATEX

THICKNESS
9MM

RANDOM
3

FEATURES



Solid
Body



Zero
Maintenance



Easy to
Clean



High
Strength



VALLUTO CLASSICO ENDLESS

VENUS GREY ENDLESS



SIZE
1200x1800mm

FINISH
MATEX

THICKNESS
9MM

RANDOM
3

FEATURES

- Solid Body
- Zero Maintenance
- Easy to Clean
- High Strength



VENUS GREY ENDLESS

TECHNICAL SPECIFICATIONS – VITRIFIED TILES

SR	Characteristics	International Std. ISO 13006 Group bia	Specification of LV tiles	Method of testing
1	Length	±0.3%	±0.1%	ISO 10545-2
2	Thickness	±5%	±5%	ISO 10545-2
3	Straightness of Sides	±0.3%	±0.1%	ISO 10545-2
4	Rectangularity	±0.3%	±0.1%	ISO 10545-2
5	Surface Flatness	±0.4%	±0.1%	ISO 10545-2
6	Glossiness	declared by manufacturer	pol-92~100%	ISO 2813 (Gloss meter)
7	Water Absorption	E? 0.5 %	? 0.05 %	ISO 10545-3
8	MOH's Hardness	? 5	? 5	IS13630-13
9	Abrasion Resistance	declared by manufacturer	PEI 3	ISO 10545-7
10	Flexural Strength (MOR)	? 35 N/mm2 (350 Kg/cm2)	? 40 N/mm2 (400 Kg/cm2)	ISO 10545 -4
11	Breaking strength	1300 Newton	1800 Newton	ISO 10545 -4
12	Density	? 2.0 gm/cc	> 2.3 gm/cc	DIN 51082
13	Thermal Shock Resistance	resistant to 10 cycles	pass min10 cycles	ISO 10545 -9
14	Crazing Resistance	In conformity with the Norms	Passed min 4 cycles at 7.5 kg/cm2/168° C	ISO 10545 - 11
15	Chemical Resistance HOUSE HOLD CHEMICALS & SWIMMING POOL SALTS	min class- GB	confirm to classes-GA	ISO 10545 -13
16	Chemical Resistance LOW CONCENTRATIONS ACIDS & ALKALIS	min class- GLB	confirm to classes-GLA	ISO 10545 -13
17	Chemical Resistance HIGH CONCENTRATIONS ACIDS & ALKALIS	min class- GHB	confirm to classes-GHA	ISO 10545 -13
18	Stain Resistance	min class-3	min confirm to class -3	ISO 10545 -14



opp. Rangpar Village , Morbi - Jetpar Road ,
MORBI - 363642 , Gujarat -INDIA

Email: sales@lvgranito.com

www.lvgranito.com